

· FT-D2000/8

·2 DDR4-SODIMM 64GB

· VGA+HDMI


·4xUSB3.0, 4xUSB2.0


·2 RS232/422/485 ·


2 GbE LAN

·1 M.2 B-key 3052 Micro SIM 5G

·DC IN 12V

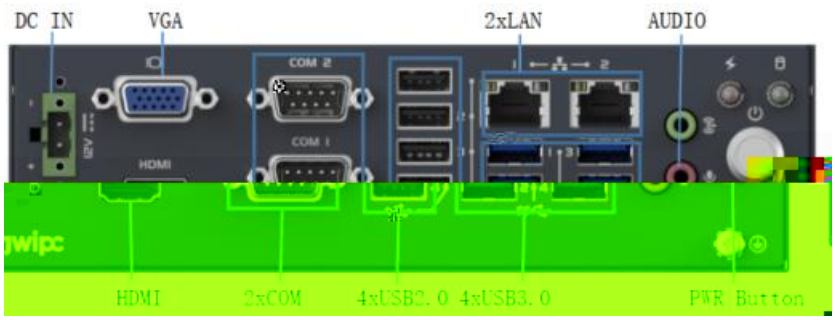

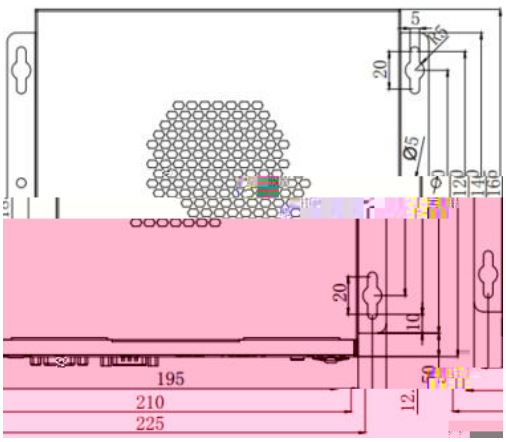

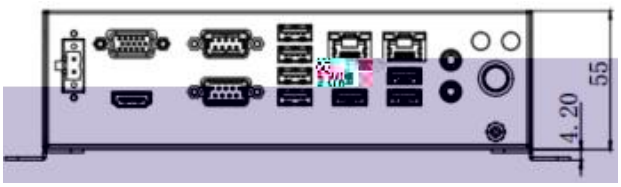

		D2000/8 2.3GHz 8C 25W
	BIOS	UEFI
		2x260-pin DDR4 2666MHz SODIMM,max 64GB
		/ OS
I/O	USB	4xUSB3.0, 4xUSB2.0
	COM	2xRS232/422/485
	LED	1xPower, 1xHDD
	PCIe/M.2/Mini-PCIe	1*Mini-PCIe 1x M.2 B-key 3052 Micro SIM 5G
	Interface	1xVGA, VGA 1920*1200@60Hz 1xHDMI,HDMI 4096*2160@24Hz
	Storage Device	1 x 2.5JHDD/SSD
	Audio IC	Realtek ALC897
	Audio Interface	1xMic-in, 1xLine-out (amp
	LAN IC	2x YT8531H-CA
	Interface	2xRJ45
	Power Input	12V, DC-in
	Power Interface	2-Pole Phoenix DC plug in
	Watchdog Timer	1 to 255 sec./min. per step
	Dimensions	195mm(W)x55mm(H)x185mm(D)
	Weight	1.55KG
	Mounting	Desk-mounting
	Operating Temp.	0~50
	Storage Temp.	-40~85
	Humidity	10%~85% Humidity, non-condensing
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	With SSD:2Grms, IEC 60068-2-64, random 5~500Hz 1 hr/axis

		‹ &	DIMM	LAN	USB3.0	USB2.0	COM	SATA3.0
JVC-8100F	D2000	2	2	2	4	4	2	1

■

